

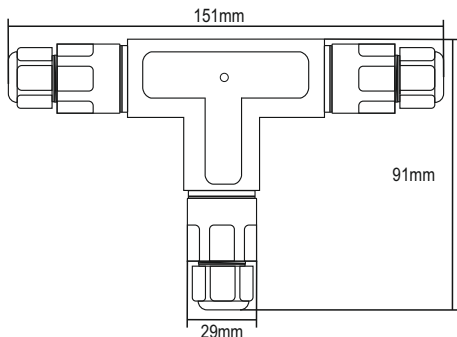


T-Skarven II 3-pol IP68

E 14 578 70



LITON AB
T-Skarven II 3-pol IP68



Med packning:
Ø 6,5mm - Ø 9mm
Utan packning:
Ø 8,5mm - Ø 11mm



Material: PA66
Packning: Silikon
Spänning: 250V
Ampere: 16A
Temperatur: -40°C +85°C
Skyddsklass: IP68

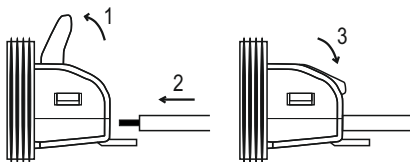

LITON AB

Höstenä 108
311 65 Vessigebro

www.liton.se